



BN MultiCoat SX30ASP/CORONA

BN MultiCoat SX30ASP

With Corona Treatment Unit


Without Corona Treatment Unit

2 Station Full Face Coating and Spot Coating
for Fujifilm Jet Press 750S



Fujifilm Jet Press 750S

In-Line Solution Available
(option)



Conveyor Bridge for In-Line Solution
with Jet Press 750S

With Corona Treatment Unit


2 in 1

Full Face + Spot
Coating

585 x 750mm Landscape


Max.Speed 4,800 sheets/h

Paper Thickness 90 — 450 gsm (for Commercial Printing)
120 — 750 gsm (for Package Printing)

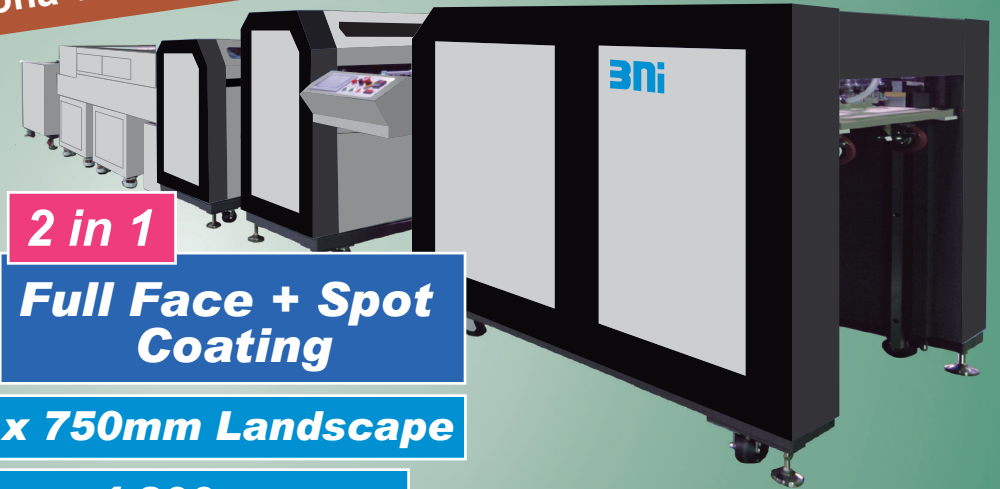

BN MultiCoatSX30ASP is designed for B2 size media to ensure high grade UV / Aqueous Varnish Coating with Corona Treatment Unit.

BN MultiCoat SX30ASP has two coating functions, spot coating and full face coating for B2 size media. For spot coating, the flexo plate roller system with chamber anilox roll achieves high grade coating for UV Varnish and Aqueous Varnish. For full face coating, two separated coating stations are available. The operator can use user-friendly touch screen controller to operate fully automatic from warm-ups, coating, job setting and cleaning.

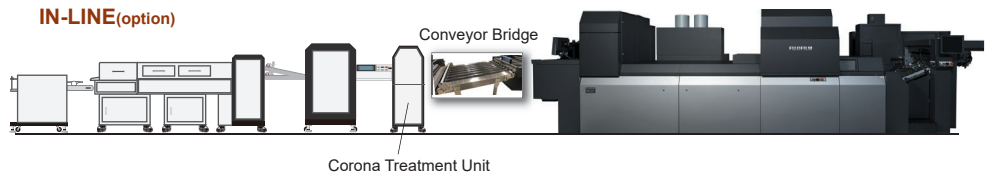

Specification

Coating Technology:	Sheet Fed Flood Coating with 2 Stations	Paper Thickness:	90 — 450 gsm (for Commercial Printing)	Feeder stacking height:	900mm
	Sheet Fed Spot Coating by Flexo Plate System		120 - 750 gsm (for Package Printing)	Stacker stacking height:	500mm
	Flexo Plate and Chamber Anilox System		*Paper thickness may not be applicable subject to the media material.	Power Supply:	200V~415V, 50/60Hz Three Phase
	IR Heater and UV Cure System, Simplex Coating	Coating Thickness:	(Full Face Coating) 6~14 Microns	Power Consumption:	16 KW
Corona Treatment Unit:	Adjustable Corona Power		(Spot Coating) Adjustable by Anilox Roll	Dimensions:	L 8.12m x W 1.23m x H 1.39m
Coating Paper Size:	Max. 585mm x 750mm	Coating Speed:	Max. 50 meter / min.	Weight:	Approx. 2500kg
	(Fuji film Jet Press 750S: 585mm x 750mm)		*Speed is variable depending on the paper (type, thickness) and environment (temperature, humidity).	Option:	In-Line Solution with Jet Press 750S
Coating Width:	Max. 762mm				available

*The specification may be changed without notice.

230724 V2