

With Corona Treatment Unit


# BN PackageCoat SX30AS/Corona

## BN PackageCoat SX30AS

With Corona Treatment Unit

Without Corona Treatment Unit

Spot UV/Aqueous Varnish Coater  
with chamber anilox roll and flexo plate  
for HP Indigo 35K / 30000  
HP Indigo 15K / 12000

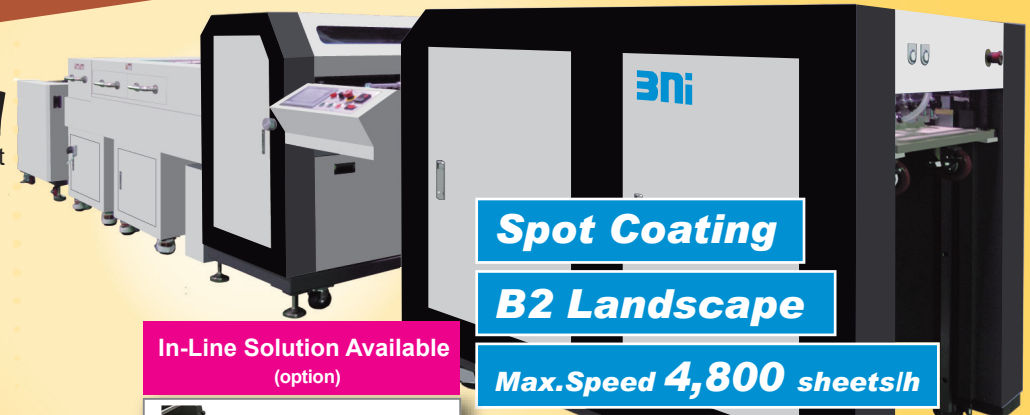

Spot Coating

B2 Landscape

Max.Speed 4,800 sheets/h

Paper Thickness 130 - 750 gsm

Specialized for  
Package Printing

In-Line Solution Available  
(option)



Conveyor Bridge for In-Line Solution  
with HP Indigo 35K/15K




HP Indigo 35K



HP Indigo 15K

### BN PackageCoat SX30AS/Corona is designed for package printing and ensures high-grade spot UV/Aqueous Varnish Coating with Flexo Plate

BN PackageCoat SX30AS/Corona is spot varnish coater compatible with digitally printed folding cartons in sizes B2. The flexo plate roller system with chamber anilox roll achieves coating ability as it matches other coating solution than UV Varnish and Aqueous Varnish. For spot coating, this unit provides smooth surface finishing. The operator can use user-friendly touch screen controller to operate fully automatic from warm-ups, coating, job setting and cleaning. The configured auto sheet feeder and auto stacker support to provide high productivity and convenience at your operations.

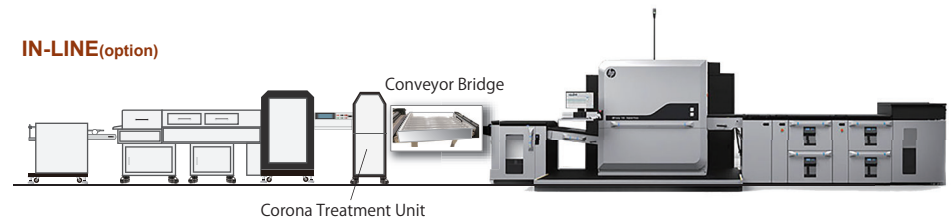

#### Specification

Coating Technology :	Sheet Fed Spot Coating by Flexo Plate System	Corona Treatment Unit:	Adjustable Corona Power	Power Supply :	200V - 415V, 50/60Hz Three Phase
	Flexo plate & Chamber Anilox System	Paper Thickness :	130 - 750gsm	Power Consumption :	16 KW
	Simplex Coating		* Paper thickness may not be applicable subject to the media material	Dimensions :	L 6.12m x W 1.70m x H 1.37m
Coating Thickness :	Adjustable by change of anilox roll	Coating Speed :	Max. 50 meter / min.	Weight :	Approx. 2440kg
Coating Paper Size (Max):	585mm x 750mm (HP Indigo 35K / 15K : 530mm x 750mm)		*Speed is variable depending on the paper (type, thickness) and environment (temperature, humidity).	Option :	In-Line Solution with HP Indigo 35K / 15K
		Feeder stacking high :	900 mm		
Coating Width (Max) :	762mm	Stacker stacking high :	500 mm		

\*The specification may be changed without notice.

240724 V6