




With Corona Treatment Unit

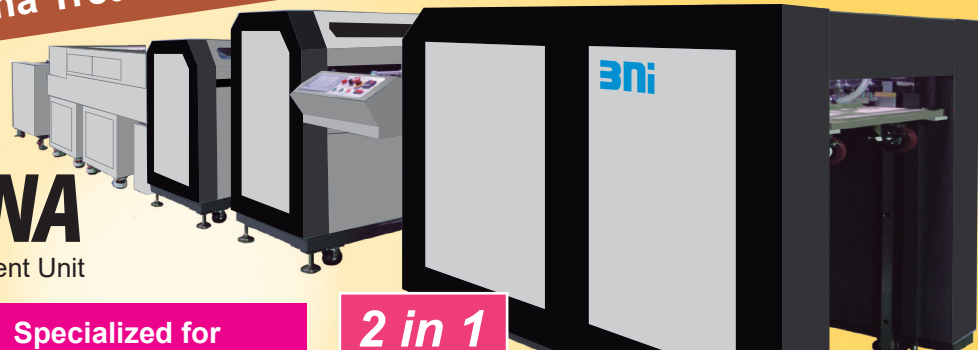

# BN PackageCoat SX30ASP/CORONA

## BN PackageCoat SX30ASP Without Corona Treatment Unit

Specialized for  
Package Printing

2 in 1

Full Face (w/2 stations) + Spot Coating

B2 Landscape

Max.Speed 4,800 sheets/h

Paper Thickness 130 — 750 gsm

UV / Aqueous Varnish  
2 Station Full Face Coating and Spot Coating  
for HP Indigo 35K / 30000  
HP Indigo 15K / 12000



HP Indigo 35K

HP Indigo 15K

BN PackageCoatSX30ASP is designed for B2 size media to ensure high grade UV / Aqueous Varnish Coating with Corona Treatment Unit.

BN PackageCoat SX30ASP has two coating functions, spot coating and full face coating for B2 size media. For spot coating, the flexo plate roller system with chamber anilox roll achieves high grade coating for UV Varnish and Aqueous Varnish. For full face coating, two separated coating stations are available. The operator can use user-friendly touch screen controller to operate fully automatic from warm-ups, coating, job setting and cleaning.

### Specification

Coating Technology:	Sheet Fed Flood Coating with 2 Stations	Paper Thickness:	130 — 750gsm	Feeder stacking height:	900mm
	Sheet Fed Spot Coating by Flexo Plate System		*Paper thickness may not be applicable subject to the media material.	Stacker stacking height:	500mm
	Flexo Plate and Chamber Anilox System	Coating Thickness:	(Full Face Coating) 6~14 Microns	Power Supply:	200V~415V, 50/60Hz Three Phase
	IR Heater and UV Cure System, Simplex Coating		(Spot Coating) Adjustable by change of Anilox Roll	Power Consumption:	16 KW
Corona Treatment Unit:	Adjustable Corona Power	Coating Speed:	Max. 50 meter / min.	Dimensions:	L 8.12m x W 1.23m x H 1.39m
Coating Paper Size:	Max. 585mm x 750mm		*Speed is variable depending on the paper (type, thickness) and environment (temperature, humidity).	Weight:	Approx. 2500kg
	(HP Indigo 35K / 30000: 530mm x 750mm)				
Coating Width:	Max. 762mm				

\*The specification may be changed without notice.